

SPLITTER JR.™

Only the Infinitex Splitter Jr. can offer these features

- Completely portable.
- One man operation.
- Extra-large capacity prefilter cartridge.
- Automatic shutdown after processing.
- State-of-the-Art Digital Electronic Controls.
- Quiet 120 VAC motor for smooth operation.
- 3-position automatic timer.
- Can operate from low cost optional tankage.
- Easy-to-see indicator lamps and pressure gauge.

Leaders in Innovative Technology


The growing need for oily wastewater disposal has finally been met. Infinitex manufactures the finest and most cost-efficient ultrafiltration systems for small shops as well as the giants in industry.

Every machine that leaves our factory is assembled by skilled craftsmen with hand-selected components. Our staff of qualified engineers and technicians is only a phone call away. Invite innovative technology into your environment. Build your success with us!

Splitter Jr. Specifications

Main Processing Unit

Height:	— 20½"	— (52.1cm)
Width:	— 20½"	— (52.1cm)
Depth:	— 10"	— (25.4cm)
Weight (Dry):	— 52 lbs.	— (23.6kg)
Power:	— 15A @ 120 VAC	
pH limits:	— 2 - 11	
Membrane:	— Spiral Wound	

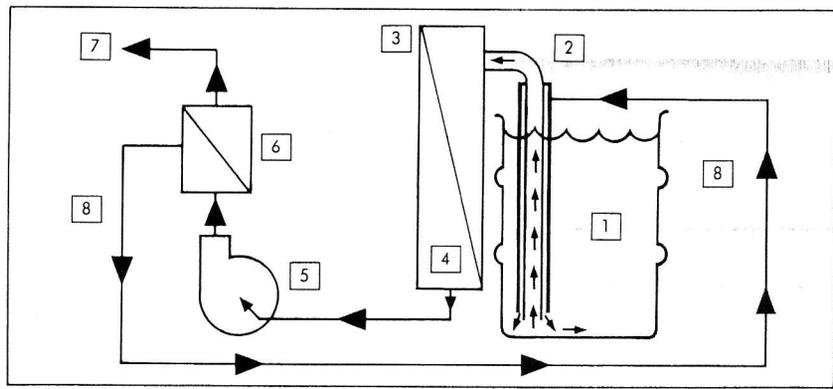

Oily wastewater [1] is drawn from the drum* into the pickup tube [2] and fed to the prefilter assembly [3] for removal of solid particles which are collected in the cartridge filter [4]. From there, the smooth permanently lubricated pump [5] transports the wastewater under pressure to the membrane [6].

Here the clean water [7] is separated from the oily wastewater which re-circulates to the waste reservoir [8], while the clean water [7] is discharged into a sewer or is reused in the original process.

*Drum not included.

INFINITEX™
LEADERS IN INNOVATIVE TECHNOLOGY

